



The ORiNOCO Classic Gold PC Card is designed to work as a client device as well as in an access point, providing connectivity to users anywhere. Easy to install, the PC Card gives you the convenience to work anytime, anywhere and any way you want.

ORINOCO® Classic Gold PC Card

802.11b Wireless Internet Access and Networking for Laptops, Portable Computing Devices and ORINOCO Access Points

The right technology for the right solution

The ORiNOCO Classic Gold PC card can be used anywhere to connect to a Wi-Fi network. The Classic PC Card can also be used as a radio in the ORiNOCO AP-2000, AP-2500 and Outdoor Router products. The card delivers high-speed wireless networking at 11 Mbit/s, operating in the 2.4 GHz unlicensed frequency. With superior radio receiver sensitivity and resilience to microwave interference, ORiNOCO has proven to be the best 802.11b radio in the industry – delivering unbeatable range and throughput performance.

Diverse levels of data protection and security


The ORiNOCO Classic Gold PC Card is equipped with a choice of security levels to protect your data. The Gold PC Card offers enhanced security, with WEP Plus, 802.1x, and 128-bit WEP employing RC4 encryption.

The ORiNOCO Classic Gold PC Card is part of the complete ORiNOCO product family of infrastructure and client products – all you need to get connected in the office, hotspots, or at home.

ORINOCO Classic Gold PC Card Features

- Plugs directly into laptop type-II PCMCIA slot
- Installs in an ORiNOCO AP-2000, AP-2500 or Outdoor Router
- Broadest operating system support
- Intuitive ORiNOCO Install Wizard for easy driver installation
- Wi-Fi (IEEE 802.11b) certified interoperability

- Low power consumption
- High performance 11 Mbit/s data rate.
- Wide coverage range of up to 1,750ft/550m
- Industry-leading radio design
- High-level security with full 128-bit key, RC4 encryption or 64-bit WEP encryption

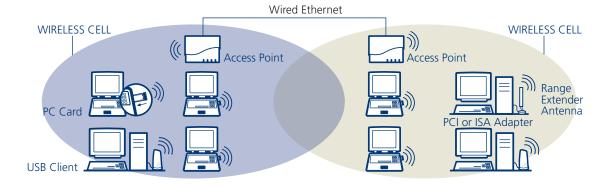



About Proxim

Proxim Corporation is a leading manufacturer of high-performance wireless local area networking (WLAN) and wireless wide area networking (WWAN) products. Proxim's ORiNOCO line of products encompasses a full range of indoor and outdoor WLAN products, as well as enhanced security products for public areas and security-conscious enterprises. Proxim sells its ORiNOCO products and solutions to service providers, enterprise customers and endusers via a network of leading OEM partners, a vast array of value-added resellers, and several e-commerce sites.

ORINOCO Classic Gold PC Card

INTERFACE		
PCMCIA		
RADIO CHARACTERISTICS		
Frequency Channels	cy Channels 2400 - 2483.5 MHz	
Modulation Technique	Direct Sequence Spread Spectrum (CCK,DQPSK, DBPSK)	
Spreading	11 - chip Barker Sequence	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Bit Error Rate (BER)	Better than 10 ⁻⁵	
Nominal Output Power	minal Output Power 15 dBm	
Power Consumption PC Card	Doze mode – 9 mA Receiver mode – 185 mA Transmit mode – 285 mA	

RANGE (METERS/FT)	11 MBIT/S	5.5 MBIT/S	2 MBIT/S	1 MBIT/S
Open	160m (525 ft)	270m (885 ft)	400m (1300 ft)	550m (1750 ft)
Semi-open	50m (165 ft)	70m (230 ft)	90m (300 ft)	115m (375 ft)
Closed	25m (80ft)	35m (115 ft)	40m (130 ft)	50m (165 ft)
Receiver Sensitivity dBm	-82	-87	-91	-94
Delay Spread (at FER of <1%)	65ns	225ns	400ns	500ns

PHYSICAL SPECIFICATIONS		
Dimensions	117.8 mm X 53.95 mm X 8.7 mm (PC Card)	
Weight	55 gram	

ENVIRONMENTAL SPECIFICATIONS					
	Temperature	Humidity			
Operating	0-55°C	95% (non condensing)			
Storage	-20-75°C	95% (non condensing)			

Operating	0-55°C	95% (non condensing)	
Storage	-20-75°C	95% (non condensing)	
POWER SUPPLY			
Voltage	5VDC from host (+/-0.2V	5VDC from host (+/-0.2V)	

LLU3	
2 LEDs:	Power
	Notwork Activity

OPERATING SYSTEMS

Novell Client 3.x &4.x, Windows 95/98/2000/XP, Me and Windows NT (NDIS Miniport driver); Apple Macintosh 8.6 and 9.x; Windows CE; Linux; Microsoft DOS

MTBF

150,000 hours based on workload, of 2040 hours/year (continuous operation), within operating conditions

WARRANTY

3 years

PACKAGE CONTENTS

- PC Card
- Getting Started Guide
- Installation Software CD-ROM

ORDERABLE PART NUMBER

8410

RELATED PRODUCTS

AP-2500 AP-2000 AP-600 BG-2000

Range Extender Antenna

 Proxim Corporation
 tel: 800.229.1630

 935 Stewart Drive
 tel: 408.731.2700

 Sunnyvale, California 94085
 fax: 408.731.3675



